

# KELVA Brakes

B0.6, B1.5, B3.0



## Improved Quality

With KELVA's High or Low Friction Brakes


- Fully air operated
- Constant web tension
- Easy to maintain and install
- Reliable high quality standards
- Three different sizes, each available with high or low friction brake pads

Kelva brakes are designed for many different applications. Our three brake sizes, all of which can be equipped with high or low friction pads, cover braking requirements for a wide variety of materials. As they are pneumatic and therefore explosion-proof, they can be used in conditions where electrically operated brakes would be unacceptable.


## PRODUCT DESCRIPTION

Product name	Kelva Brakes B0.6, B1.5 and B3.0
Brake pads	Can be connected to operate on 2, 4 or 6 brake pads
Control	Pneumatic and air cooled
Shaft standards	B0.6 - 25mm B1.5 - 35, 32.5, 30mm B3.0 - 40, 35 and 32.5mm
Safety	Explosion proof

## DIMENSIONS

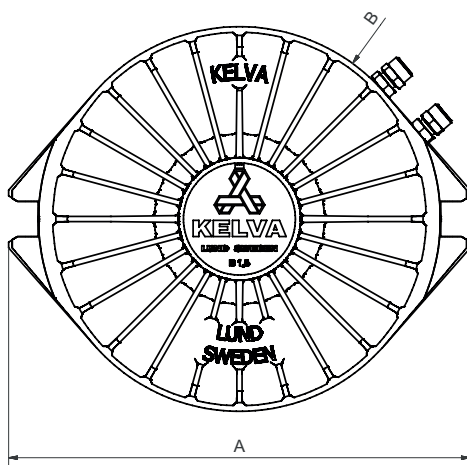

Dimensions			
Model	Shaft Ø	A	B
B0.6	25mm	220mm	Ø180mm
B1.5	35, 32,5 and 30mm	260mm	Ø220mm
B3.0	40, 35 and 32,5mm	370mm	Ø342mm

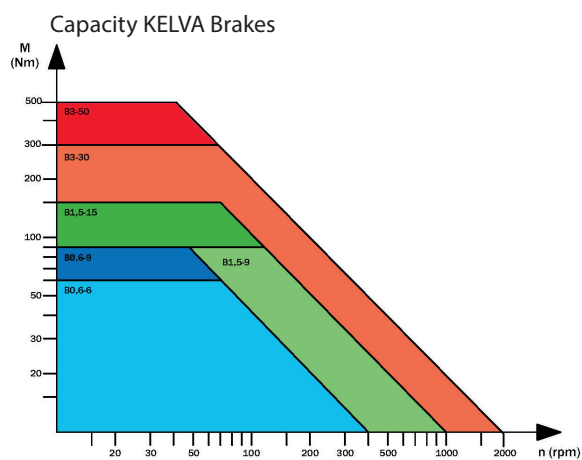

Brake	Brake pads		Max brake power		Max brake torque	
	Low friction	High friction	hp	kW	kpm	Nm
B0,6 - 6	X		0,6	0,44	6	60
B0,6 - 9		X	0,6	0,44	9	90
B1,5 - 9	X		1,5	1,1	9	90
B1,5 - 15		X	1,5	1,1	15	150
B3 - 30	X		3,0	2,2	30	300
B3 - 50		X	3,0	2,2	50	500



### SALES OFFICE AB KELVA

Box 4012  
SE-22721 Lund  
Sweden  
Phone: +46 46 16 07 00  
kelva@kelva.com

### BENELUX OFFICE

Pamouslaan 155  
NL - 1382 JN Weesp  
The Netherlands  
Phone: +31 627 07 71 77  
kelva@kelva.com

### GERMAN OFFICE

Winkelhaiderstrasse 42A  
D-90537 Feucht  
Germany  
Phone: +49 9128 724 11 19  
kelva@kelva.com

### SWISS OFFICE IMSAG AG

Niederhaslistrasse 12  
CH - 8157 Dielsdorf  
Switzerland  
Phone: +41 44 732 22 73  
info@imsag.com